


# Isolator

<p><b>S3100 - Admore 100A 3 Pole Modular Isolator Switch</b></p> <p>Brand: Admore  Type of order: Break Switch  Neutral position: without neutral  Number of poles: 3P  Number of modules: 3  Rated operational voltage Ue: 415 V/AC  Frequency: 50/60 Hz  Rated insulation voltage: 690VAC  Rated impulse withstand voltage: 6000V  Rated current: 100A  Rated short-time withstand current 1s: 1.5kA  Electrical durability at nominal load operating cycles: 2500  Number of mechanical operations: 40000  Cage clamp position: in line  Type of connection: with screw  Operating temperature: -20 - +50°C  Protection degree: IP20</p>	<p>No image available</p>
<p><b>S2063 - Admore 63A 2 Pole Modular Isolator Switch</b></p> <p>Brand: Admore  Type of order: Break Switch  Neutral position: without neutral  Number of poles: 2P  Number of modules: 2  Rated operational voltage Ue: 415 V/AC  Frequency: 50/60 Hz  Rated insulation voltage: 690VAC  Rated impulse withstand voltage: 6000V  Rated current: 63A  Rated short-time withstand current 1s: 1.5kA  Electrical durability at nominal load operating cycles: 2500  Number of mechanical operations: 40000  Cage clamp position: in line  Type of connection: with screw  Operating temperature: -20 - +50°C  Protection degree: IP20</p>	<p>No image available</p>
<p><b>S2040 - Admore 40A 2 Pole Modular Isolator Switch</b></p> <p>Brand: Admore  Type of order: Break Switch  Neutral position: without neutral  Number of poles: 2P  Number of modules: 2  Rated operational voltage Ue: 415 V/AC  Frequency: 50/60 Hz  Rated insulation voltage: 690VAC  Rated impulse withstand voltage: 6000V  Rated current: 40A  Rated short-time withstand current 1s: 1.5kA  Electrical durability at nominal load operating cycles: 2500  Number of mechanical operations: 40000  Cage clamp position: in line  Type of connection: with screw  Operating temperature: -20 - +50°C  Protection degree: IP20</p>	 <p>The image shows a white, modular isolator switch with a red handle. The handle is in the 'off' position. The device has two main terminals at the top and two at the bottom. The label on the front indicates 'ADMORE S-2040 40A' and '415V-50/60Hz'. There is also a CE mark and some smaller text.</p>

**S2100 - Admore 100A 2 Pole Modular Isolator Switch**

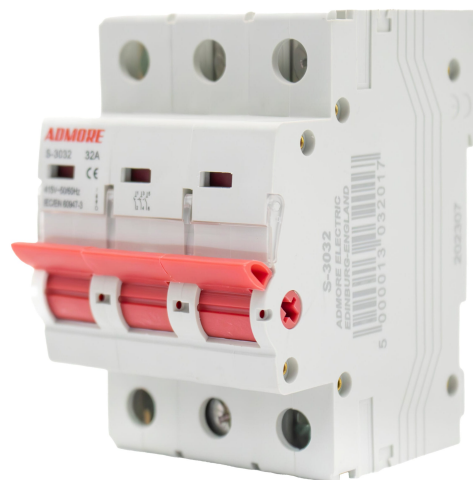
Brand: Admore  
Type of order: Break Switch  
Neutral position: without neutral  
Number of poles: 2P  
Number of modules: 2  
Rated operational voltage Ue: 415 V/AC  
Frequency: 50/60 Hz  
Rated insulation voltage: 690VAC  
Rated impulse withstand voltage: 6000V  
Rated current: 100A  
Rated short-time withstand current 1s: 1.5kA  
Electrical durability at nominal load operating cycles: 2500  
Number of mechanical operations: 40000  
Cage clamp position: in line  
Type of connection: with screw  
Operating temperature: -20 - +50°C  
Protection degree: IP20

**S3020 - Admore 20A 3 Pole Modular Isolator Switch**

Brand: Admore  
Type of order: Break Switch  
Neutral position: without neutral  
Number of poles: 3P  
Number of modules: 3  
Rated operational voltage Ue: 415 V/AC  
Frequency: 50/60 Hz  
Rated insulation voltage: 690VAC  
Rated impulse withstand voltage: 6000V  
Rated current: 20A  
Rated short-time withstand current 1s: 1.5kA  
Electrical durability at nominal load operating cycles: 2500  
Number of mechanical operations: 40000  
Cage clamp position: in line  
Type of connection: with screw  
Operating temperature: -20 - +50°C  
Protection degree: IP20

**S3032 - Admore 32A 3 Pole Modular Isolator Switch**

Brand: Admore  
Type of order: Break Switch  
Neutral position: without neutral  
Number of poles: 3P  
Number of modules: 3  
Rated operational voltage Ue: 415 V/AC  
Frequency: 50/60 Hz  
Rated insulation voltage: 690VAC  
Rated impulse withstand voltage: 6000V  
Rated current: 32A  
Rated short-time withstand current 1s: 1.5kA  
Electrical durability at nominal load operating cycles: 2500  
Number of mechanical operations: 40000  
Cage clamp position: in line  
Type of connection: with screw  
Operating temperature: -20 - +50°C  
Protection degree: IP20

**S3040 - Admore 40A 3 Pole Modular Isolator**

**Switch**

Brand: Admore  
Type of order: Break Switch  
Neutral position: without neutral  
Number of poles: 3P  
Number of modules: 3  
Rated operational voltage Ue: 415 V/AC  
Frequency: 50/60 Hz  
Rated insulation voltage: 690VAC  
Rated impulse withstand voltage: 6000V  
Rated current: 40A  
Rated short-time withstand current 1s: 1.5kA  
Electrical durability at nominal load operating cycles: 2500  
Number of mechanical operations: 40000  
Cage clamp position: in line  
Type of connection: with screw  
Operating temperature: -20 - +50°C  
Protection degree: IP20

**S3063 - Admore 63A 3 Pole Modular Isolator Switch**

Brand: Admore  
Type of order: Break Switch  
Neutral position: without neutral  
Number of poles: 3P  
Number of modules: 3  
Rated operational voltage Ue: 415 V/AC  
Frequency: 50/60 Hz  
Rated insulation voltage: 690VAC  
Rated impulse withstand voltage: 6000V  
Rated current: 63A  
Rated short-time withstand current 1s: 1.5kA  
Electrical durability at nominal load operating cycles: 2500  
Number of mechanical operations: 40000  
Cage clamp position: in line  
Type of connection: with screw  
Operating temperature: -20 - +50°C  
Protection degree: IP20

**S4040 - Admore 40A 4 Pole Modular Isolator Switch**

Brand: Admore  
Type of order: Break Switch  
Neutral position: without neutral  
Number of poles: 4P  
Number of modules: 4  
Rated operational voltage Ue: 415 V/AC  
Frequency: 50/60 Hz  
Rated insulation voltage: 690VAC  
Rated impulse withstand voltage: 6000V  
Rated current: 40A  
Rated short-time withstand current 1s: 1.5kA  
Electrical durability at nominal load operating cycles: 2500  
Number of mechanical operations: 40000  
Cage clamp position: in line  
Type of connection: with screw  
Operating temperature: -20 - +50°C  
Protection degree: IP20

**S4063 - Admore 63A 4 Pole Modular Isolator Switch**

Brand: Admore  
Type of order: Break Switch  
Neutral position: without neutral  
Number of poles: 4P  
Number of modules: 4  
Rated operational voltage Ue: 415 V/AC  
Frequency: 50/60 Hz  
Rated insulation voltage: 690VAC  
Rated impulse withstand voltage: 6000V  
Rated current: 63A  
Rated short-time withstand current 1s: 1.5kA  
Electrical durability at nominal load operating cycles: 2500  
Number of mechanical operations: 40000  
Cage clamp position: in line  
Type of connection: with screw  
Operating temperature: -20 - +50°C  
Protection degree: IP20



**S40100 - Admore 100A 4 Pole Modular Isolator Switch**

Brand: Admore  
Type of order: Break Switch  
Neutral position: without neutral  
Number of poles: 4P  
Number of modules: 4  
Rated operational voltage Ue: 415 V/AC  
Frequency: 50/60 Hz  
Rated insulation voltage: 690VAC  
Rated impulse withstand voltage: 6000V  
Rated current: 100A  
Rated short-time withstand current 1s: 1.5kA  
Electrical durability at nominal load operating cycles: 2500  
Number of mechanical operations: 40000  
Cage clamp position: in line  
Type of connection: with screw  
Operating temperature: -20 - +50°C  
Protection degree: IP20



Electricals L.L.C.