


# Isolator

<p><b>S3100 - Admore 100A 3 Pole Modular Isolator Switch</b></p> <p>Brand: Admore Type of order: Break Switch Neutral position: without neutral Number of poles: 3P Number of modules: 3 Rated operational voltage Ue: 415 V/AC Frequency: 50/60 Hz Rated insulation voltage: 690VAC Rated impulse withstand voltage: 6000V Rated current: 100A Rated short-time withstand current 1s: 1.5kA Electrical durability at nominal load operating cycles: 2500 Number of mechanical operations: 40000 Cage clamp position: in line Type of connection: with screw Operating temperature: -20 - +50°C Protection degree: IP20</p>	No image available
<p><b>S2063 - Admore 63A 2 Pole Modular Isolator Switch</b></p> <p>Brand: Admore Type of order: Break Switch Neutral position: without neutral Number of poles: 2P Number of modules: 2 Rated operational voltage Ue: 415 V/AC Frequency: 50/60 Hz Rated insulation voltage: 690VAC Rated impulse withstand voltage: 6000V Rated current: 63A Rated short-time withstand current 1s: 1.5kA Electrical durability at nominal load operating cycles: 2500 Number of mechanical operations: 40000 Cage clamp position: in line Type of connection: with screw Operating temperature: -20 - +50°C Protection degree: IP20</p>	No image available
<p><b>S4063 - Admore 63A 4 Pole Modular Isolator Switch</b></p> <p>Brand: Admore Type of order: Break Switch Neutral position: without neutral Number of poles: 4P Number of modules: 4 Rated operational voltage Ue: 415 V/AC Frequency: 50/60 Hz Rated insulation voltage: 690VAC Rated impulse withstand voltage: 6000V Rated current: 63A Rated short-time withstand current 1s: 1.5kA Electrical durability at nominal load operating cycles: 2500 Number of mechanical operations: 40000 Cage clamp position: in line Type of connection: with screw Operating temperature: -20 - +50°C Protection degree: IP20</p>	 A photograph of the Admore S4063 63A 4 Pole Modular Isolator Switch. The device is a white, rectangular, modular switch with four poles. It features a red handle on the front and four green indicator lights on the top. The brand name 'ADMORE' and the model 'S-4063 63A' are visible on the front panel. The switch is designed for use in a rack or panel.

**S40100 - Admore 100A 4 Pole Modular Isolator Switch**

Brand: Admore  
Type of order: Break Switch  
Neutral position: without neutral  
Number of poles: 4P  
Number of modules: 4  
Rated operational voltage Ue: 415 V/AC  
Frequency: 50/60 Hz  
Rated insulation voltage: 690VAC  
Rated impulse withstand voltage: 6000V  
Rated current: 100A  
Rated short-time withstand current 1s: 1.5kA  
Electrical durability at nominal load operating cycles: 2500  
Number of mechanical operations: 40000  
Cage clamp position: in line  
Type of connection: with screw  
Operating temperature: -20 - +50°C  
Protection degree: IP20

**S2040 - Admore 40A 2 Pole Modular Isolator Switch**

Brand: Admore  
Type of order: Break Switch  
Neutral position: without neutral  
Number of poles: 2P  
Number of modules: 2  
Rated operational voltage Ue: 415 V/AC  
Frequency: 50/60 Hz  
Rated insulation voltage: 690VAC  
Rated impulse withstand voltage: 6000V  
Rated current: 40A  
Rated short-time withstand current 1s: 1.5kA  
Electrical durability at nominal load operating cycles: 2500  
Number of mechanical operations: 40000  
Cage clamp position: in line  
Type of connection: with screw  
Operating temperature: -20 - +50°C  
Protection degree: IP20

**S2100 - Admore 100A 2 Pole Modular Isolator Switch**

Brand: Admore  
Type of order: Break Switch  
Neutral position: without neutral  
Number of poles: 2P  
Number of modules: 2  
Rated operational voltage Ue: 415 V/AC  
Frequency: 50/60 Hz  
Rated insulation voltage: 690VAC  
Rated impulse withstand voltage: 6000V  
Rated current: 100A  
Rated short-time withstand current 1s: 1.5kA  
Electrical durability at nominal load operating cycles: 2500  
Number of mechanical operations: 40000  
Cage clamp position: in line  
Type of connection: with screw  
Operating temperature: -20 - +50°C  
Protection degree: IP20

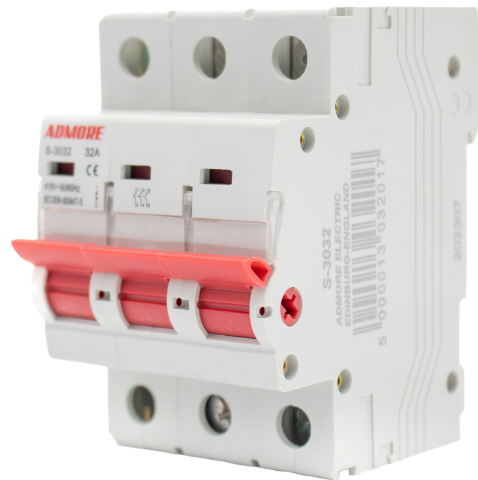
**S3020 - Admore 20A 3 Pole Modular Isolator**

**Switch**

Brand: Admore  
Type of order: Break Switch  
Neutral position: without neutral  
Number of poles: 3P  
Number of modules: 3  
Rated operational voltage Ue: 415 V/AC  
Frequency: 50/60 Hz  
Rated insulation voltage: 690VAC  
Rated impulse withstand voltage: 6000V  
Rated current: 20A  
Rated short-time withstand current 1s: 1.5kA  
Electrical durability at nominal load operating cycles: 2500  
Number of mechanical operations: 40000  
Cage clamp position: in line  
Type of connection: with screw  
Operating temperature: -20 - +50°C  
Protection degree: IP20

**S3032 - Admore 32A 3 Pole Modular Isolator Switch**

Brand: Admore  
Type of order: Break Switch  
Neutral position: without neutral  
Number of poles: 3P  
Number of modules: 3  
Rated operational voltage Ue: 415 V/AC  
Frequency: 50/60 Hz  
Rated insulation voltage: 690VAC  
Rated impulse withstand voltage: 6000V  
Rated current: 32A  
Rated short-time withstand current 1s: 1.5kA  
Electrical durability at nominal load operating cycles: 2500  
Number of mechanical operations: 40000  
Cage clamp position: in line  
Type of connection: with screw  
Operating temperature: -20 - +50°C  
Protection degree: IP20

**S3040 - Admore 40A 3 Pole Modular Isolator Switch**

Brand: Admore  
Type of order: Break Switch  
Neutral position: without neutral  
Number of poles: 3P  
Number of modules: 3  
Rated operational voltage Ue: 415 V/AC  
Frequency: 50/60 Hz  
Rated insulation voltage: 690VAC  
Rated impulse withstand voltage: 6000V  
Rated current: 40A  
Rated short-time withstand current 1s: 1.5kA  
Electrical durability at nominal load operating cycles: 2500  
Number of mechanical operations: 40000  
Cage clamp position: in line  
Type of connection: with screw  
Operating temperature: -20 - +50°C  
Protection degree: IP20

**S3063 - Admore 63A 3 Pole Modular Isolator Switch**

Brand: Admore  
Type of order: Break Switch  
Neutral position: without neutral  
Number of poles: 3P  
Number of modules: 3  
Rated operational voltage Ue: 415 V/AC  
Frequency: 50/60 Hz  
Rated insulation voltage: 690VAC  
Rated impulse withstand voltage: 6000V  
Rated current: 63A  
Rated short-time withstand current 1s: 1.5kA  
Electrical durability at nominal load operating cycles: 2500  
Number of mechanical operations: 40000  
Cage clamp position: in line  
Type of connection: with screw  
Operating temperature: -20 - +50°C  
Protection degree: IP20



#### **S4040 - Admore 40A 4 Pole Modular Isolator Switch**

Brand: Admore  
Type of order: Break Switch  
Neutral position: without neutral  
Number of poles: 4P  
Number of modules: 4  
Rated operational voltage Ue: 415 V/AC  
Frequency: 50/60 Hz  
Rated insulation voltage: 690VAC  
Rated impulse withstand voltage: 6000V  
Rated current: 40A  
Rated short-time withstand current 1s: 1.5kA  
Electrical durability at nominal load operating cycles: 2500  
Number of mechanical operations: 40000  
Cage clamp position: in line  
Type of connection: with screw  
Operating temperature: -20 - +50°C  
Protection degree: IP20



Electricals L.L.C.